



SELF-PRIMING PUMPS 



# FDX BLADE S



## BXD

**Self-priming** axial pump, 3 stainless steel pistons and brass pump head

*Pompa **autoadescante** con 3 pistoni assiali inox e testata in ottone*



## BWD-K

**Self-priming** triplex pumps, 3 ceramic pistons, brass pump head, bronze rods

*Pompa **autoadescante** con 3 pistoni in linea in ceramica, testata in ottone e bielle in bronzo*



Height-adjustable and foldable handlebar

*Manubrio regolabile in altezza e ripiegabile*



Pneumatic rubber wheels (optional)

*Ruote pneumatiche in gomma (su richiesta)*




Easy to handle up and down steps and over uneven ground

*Facilità di movimento su gradini e fondi sconnessi*



Well balanced for easy handling

*Estrema maneggevolezza grazie alla favorevole posizione del baricentro*

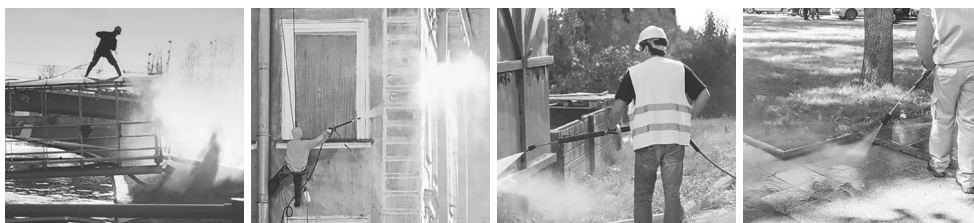

## GENERAL FEATURES · CARATTERISTICHE GENERALI

- Honda and Loncin gasoline engines
- Versions with Comet BXD **self-priming** axial pump, 3 stainless steel pistons and brass pump head
- Versions with Comet BWD-K **self-priming** triplex pump, 3 ceramic pistons, brass pump head, bronze rods
- Professional unloader valve
- Low-pressure detergent suction
- Readily serviceable water suction filter
- Oil-alert safety device for engine protection
- Ø 260 rubber wheels (optional)
- Stabilizing rubber feet
- Pressure gauge
- Motori a benzina Honda e Loncin
- Modelli con pompa **autoadescante** Comet BXD con 3 pistoni assiali inox e testata in ottone
- Modelli con pompa **autoadescante** Comet BWD-K con 3 pistoni in linea in ceramica, testata in ottone e bielle in bronzo
- Valvola di regolazione professionale
- Aspirazione detergente in bassa pressione
- Filtro acqua di aspirazione facilmente ispezionabile
- Dispositivo di sicurezza Oil-Alert (mancanza olio) per la protezione del motore
- Ruote in gomma Ø 260 per uso gravoso (su richiesta)
- Uso semiprofessionale gravoso
- Piedi antivibranti in gomma
- Manometro

## TECHNICAL FEATURES · CARATTERISTICHE TECNICHE

CODE CODICE	MODELS MODELLI	PUMP POMPA	MAX		MAX		It	kg	(L x W x H) cm	
			bar	MPa	l/h	HP				kW
ON REQUEST	FDX Blade S 13/150 - Honda GP160	BXD	150	15	780	5,0	3,7	3,1	30	64 x 45 x 85 56 x 45 x 61 *
ON REQUEST	FDX Blade S 12/200 - Loncin G200 F	BXD	200	20	720	6,0	4,4	3,1	30	64 x 45 x 85 56 x 45 x 61 *
ON REQUEST	FDX Blade S 12/200 - Honda GP200	BXD	200	20	720	6,0	4,4	3,1	30	64 x 45 x 85 56 x 45 x 61 *
ON REQUEST	FDX Blade S 13/180 - Loncin G200 F	BWD-K	180	18	780	6,0	4,4	3,1	34	64 x 45 x 85 56 x 45 x 61 *
ON REQUEST	FDX Blade S 13/180 - Honda GX200	BWD-K	180	18	780	6,0	4,4	3,1	34	64 x 45 x 85 56 x 45 x 61 *

\* Height with handle closed · Altezza con manubrio chiuso

## STANDARD EQUIPMENT · DOTAZIONE STANDARD



GC 251 gun with protection  
Pistola GC 251 con protezione



Lance with adjustable jet, with nozzle  
Lancia getto regolabile con ugello



10 m rubber delivery hose kit  
Kit tubo gomma mandata 10 m



Plastic inlet water filter  
Filtro ingresso acqua in plastica